



Low Static Duct

ARNU05GL1G2 ARNU07GL1G2 ARNU09GL1G2



Model	ARNU05GL1G2		ARNU07GL1G2		ARNU09GL1G2	
Capacity	Cooling	Nom kW	1.7	2.2	2.8	
	Heating	Nom kW	1.9	2.5	3.2	
Power Input	Cooling	Nom W	40	40	40	
	Heating	Nom W	40	40	40	
Power Supply	ø/V/Hz		1 / 220-240 / 50		1 / 220-240 / 50	
Airflow Rate (High mode)	Cooling	H/M/L m³/min	6.7 / 6.2 / 5.5		7.5 / 6.5 / 5.5	
	Heating	H/M/L m³/min	6.7 / 6.2 / 5.5		9.0 / 7.0 / 5.5	
External Static Pressure	High Mode - Factory Set	mmAq(Pa)	2.54(25)		2.54(25)	
Sound Pressure	H/M/L	dB(A)	25 / 24 / 22		26 / 24 / 22	
Dimensions	Body	WxHxD mm	700 x 190 x 700		700 x 190 x 700	
Net Weight		kg(lbs)	17.5(38.6)		17.5(38.6)	
Piping Connection	Liquid	mm(inch)	6.35(1/4)		6.35(1/4)	
	Gas	mm(inch)	12.7(1/2)		12.7(1/2)	
	Drain I.D.	mm(inch)	25.4(1)		25.4(1)	
Fan motor output x Numver	W		19 x 1		19 x 1	

Note :

1. Capacities are based on the following conditions

Cooling - Indoor temp. 27°C(80.6°F)DB / 19°C(66.2°F)WB
 Outdoor temp. 35°C(95°F)DB / 24°C(75.2°F)WB
 Interconnecting piping length 7.5m
 Level difference of zero

Heating - Indoor temp. 20°C(68°F)DB / 15°C(59°F)WB
 Outdoor temp. 7°C(44.6°F)DB / 6°C(42.8°F)WB
 Interconnecting piping length 7.5m
 Level difference of zero

2. Due to our policy of innovation some specifications may be changed without notification
 3. L1 : The Sound Pressure test condition is based on 20 Pa (Static Pressure) as standard.



Accessories

Model	ARNU05GL1G2	ARNU07GL1G2	ARNU09GL1G2
Dry Contact	Without Case (1 Contact Point)	PQDSA	
	With Case (1 Contact Point)	PQDSB / PQDSB1	
	With Case (2 Contact Point)	PQDSBC	

Wired Remote Controller					Wireless Remote Controller
Deluxe Type	Standard Type	Standard Type	Simple Type	Simple Type for Hotel	
PQRCUDS0(white) PQRCUDS0B(blue) PQRCUDS0S(silver)	PQRCVSL0	PQRCVSL0QW	PQRCVCLOQ (Black) PQRCVCL0QW (white)	PQRCCHA0Q(Black) PQRCCHA0QW(White)	PQWRHQ0FB

Low Static Duct

ARNU12GL2G2 ARNU15GL2G2
 ARNU18GL2G2 ARNU21GL3G2 ARNU24GL3G2

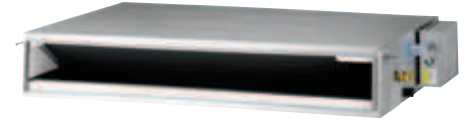

Model	ARNU12GL2G2		ARNU15GL2G2		ARNU18GL2G2		ARNU21GL3G2		ARNU24GL3G2	
Capacity	Cooling	Nom kW	3.6	4.5	5.6	6.2	6.2	7.1		
	Heating	Nom kW	4.0	5.0	6.3	7.0	7.0	8.0		
Power Input	Cooling	Nom W	85	85	85	115	115	115		
	Heating	Nom W	85	85	85	115	115	115		
Power Supply	ø/V/Hz		1 / 220-240 / 50		1 / 220-240 / 50		1 / 220-240 / 50		1 / 220-240 / 50	
Airflow Rate (High mode)	Cooling	H/M/L m³/min	10.0 / 8.5 / 7.0		12.5 / 10.0 / 8.5		15.0 / 12.5 / 10.0		17.5 / 14.0 / 12.0	
	Heating	H/M/L m³/min	10.0 / 8.5 / 7.0		12.5 / 10.0 / 8.5		15.0 / 12.5 / 10.0		17.5 / 14.0 / 12.0	
External Static Pressure	High Mode - Factory Set	mmAq(Pa)	2.54(25)		2.54(25)		2.54(25)		2.54(25)	
Sound Pressure	H/M/L	dB(A)	30 / 27 / 25		33 / 30 / 28		35 / 29 / 28		36 / 33 / 28	
Dimensions	Body	WxHxD mm	900 x 190 x 700		900 x 190 x 700		900 x 190 x 700		1,100 x 190 x 700	
Net Weight		kg(lbs)	23(50.7)		23(50.7)		27(59.5)		27(59.5)	
Piping Connection	Liquid	mm(inch)	6.35(1/4)		6.35(1/4)		6.35(1/4)		9.52(3/8)	
	Gas	mm(inch)	12.7(1/2)		12.7(1/2)		12.7(1/2)		15.88(5/8)	
	Drain I.D.	mm(inch)	25.4(1)		25.4(1)		25.4(1)		25.4(1)	
Fan motor output x Numver	W		19 x 1, 5 x 1		19 x 1, 5 x 1		19 x 1, 5 x 1		19 x 2	

Note :

1. Capacities are based on the following conditions

Cooling - Indoor temp. 27°C(80.6°F)DB / 19°C(66.2°F)WB
 Outdoor temp. 35°C(95°F)DB / 24°C(75.2°F)WB
 Interconnecting piping length 7.5m
 Level difference of zero

Heating - Indoor temp. 20°C(68°F)DB / 15°C(59°F)WB
 Outdoor temp. 7°C(44.6°F)DB / 6°C(42.8°F)WB
 Interconnecting piping length 7.5m
 Level difference of zero

2. Due to our policy of innovation some specifications may be changed without notification
 3. L2, L3 : The Sound Pressure test condition is based on 20 Pa (Static Pressure) as standard.

Accessories

Model	ARNU12GL2G2	ARNU15GL2G2	ARNU18GL2G2	ARNU21GL3G2	ARNU24GL3G2
Dry Contact	Without Case (1 Contact Point)	PQDSA			
	With Case (1 Contact Point)	PQDSB / PQDSB1			
	With Case (2 Contact Point)	PQDSBC			

Wired Remote Controller					Wireless Remote Controller
Deluxe Type	Standard Type	Standard Type	Simple Type	Simple Type for Hotel	
PQRCUDS0(white) PQRCUDS0B(blue) PQRCUDS0S(silver)	PQRCVSL0	PQRCVSL0QW	PQRCVCLOQ (Black) PQRCVCL0QW (white)	PQRCCHA0Q(Black) PQRCCHA0QW(White)	PQWRHQ0FB

INDOOR UNITS