


# Wall Mounted

ARNU05GSBL2 ARNU07GSBL2 ARNU09GSBL2  
ARNU12GSBL2 ARNU15GSBL2 ARNU18GSCL2 ARNU24GSCL2

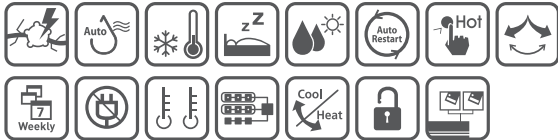

Model				ARNU05GSBL2	ARNU07GSBL2	ARNU09GSBL2	ARNU12GSBL2	ARNU15GSBL2	ARNU18GSCL2	ARNU24GSCL2
Capacity	Cooling	Nom	kW	1.6	2.2	2.8	3.6	4.5	5.6	7.1
	Heating	Nom	kW	1.8	2.5	3.2	4.0	5.0	6.3	8.0
Power Input	Cooling	Nom	W	21.0	21.0	21.0	21.0	21.0	39.5	39.5
	Heating	Nom	W	21.0	21.0	21.0	21.0	21.0	39.5	39.5
Power Supply			ø/V/Hz	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50
Airflow Rate	Cooling	H/M/L	m <sup>3</sup> /min	6.5/6.0/5.5	7.0/6.5/5.5	8.2/7.0/5.5	9.5/8.2/6.5	10.5/9.0/7.0	12.5/12.0/11.3	14.0/12.7/11.5
	Heating	H/M/L	m <sup>3</sup> /min	6.5/6.0/5.5	7.0/6.5/5.5	8.2/7.0/5.5	9.5/8.2/6.5	10.5/9.0/7.0	12.5/12.0/11.3	14.0/12.7/11.5
Sound Pressure		H/M/L	dBA	30/29/28	32/30/28	34/32/28	37/34/30	40/36/32	38/35/33	43/39/35
Dimensions	Body	WxHxD	mm	895x289x215	895x289x215	895x289x215	895x289x215	895x289x215	1,030x325x255	1,030x325x255
Net Weight			kg(lbs)	10.0 (22.0)	10.0 (22.0)	10.0 (22.0)	10.0 (22.0)	10.0 (22.0)	14.0 (30.9)	14.0 (30.9)
Piping Connection	Liquid		mm(inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)	6.35(1/4)	6.35(1/4)	6.35(1/4)	9.52(3/8)
	Gas		mm(inch)	12.7(1/2)	12.7(1/2)	12.7(1/2)	12.7(1/2)	12.7(1/2)	12.7(1/2)	15.88(5/8)
	Drain	I.D.	mm(inch)	16(5/8)	16(5/8)	16(5/8)	16(5/8)	16(5/8)	16(5/8)	16(5/8)

**Note :**

1. Capacities are based on the following conditions






Cooling - Indoor temp. 27°C(80.6°F)DB / 19°C(66.2°F)WB  
Outdoor temp. 35°C(95°F)DB / 24°C(75.2°F)WB  
Interconnecting piping length 7.5m  
Level difference of zero

Heating - Indoor temp. 20°C(68°F)DB / 15°C(59°F)WB  
Outdoor temp. 7°C(44.6°F)DB / 6°C(42.8°F)WB  
Interconnecting piping length 7.5m  
Level difference of zero

2. Due to our policy of innovation some specifications may be changed without notification

## Accessories

Model	ARNU07GSBL2	ARNU09GSBL2	ARNU12GSBL2	ARNU15GSBL2	ARNU18GSCL2	ARNU24GSCL2
Dry Contact	Without Case (1 Contact Point)					
	With Case (1 Contact Point)					
	With Case (2 Contact Point)					

Wired Remote Controller				Wireless Remote Controller
Standard Type	Standard Type	Simple Type	Simple Type for Hotel	
				
PQRCUDS0	PQRCVSL0QW	PQRCVCL0Q (Black) PQRCVCL0QW (white)	PQRCHCA0Q(Black) PQRCHCA0QW(White)	PQWRHQ0FDB