


Console

ARNU07GQAA2 ARNU09GQAA2
ARNU12GQAA2 ARNU15GQAA2

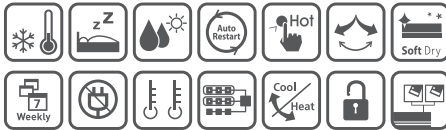

Model				ARNU07GQAA2	ARNU09GQAA2	ARNU12GQAA2	ARNU15GQAA2
Capacity	Cooling	Nom	kW	2.2	2.8	3.6	4.5
	Heating	Nom	kW	2.5	3.2	4.0	5.0
Power Input	Cooling	Nom	W	30	30	30	30
	Heating	Nom	W	30	30	30	30
Power Supply			ø/V/Hz	1 / 220 -240 / 50	1 / 220 -240 / 50	1 / 220 -240 / 50	1 / 220 -240 / 50
Airflow Rate	Cooling	H/M/L	m ³ /min	6.7 / 5.9 / 4.8	6.7 / 5.9 / 4.8	7.5 / 5.9 / 4.8	8.7 / 6.7 / 5.9
	Heating	H/M/L	m ³ /min	6.7 / 5.9 / 4.8	6.7 / 5.9 / 4.8	7.5 / 5.9 / 4.8	8.7 / 6.7 / 5.9
Sound Pressure		H/M/L	dBA	37 / 34 / 28	37 / 34 / 28	39 / 34 / 28	42 / 37 / 31
Dimensions	Body	WxHxD	mm	700 x 600 x 210	700 x 600 x 210	700 x 600 x 210	700 x 600 x 210
Net Weight			kg(lbs)	14.0(30.9)	14.0(30.9)	14.0(30.9)	14.0(30.9)
Piping Connection	Liquid		mm(inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)	6.35(1/4)
	Gas		mm(inch)	12.7(1/2)	12.7(1/2)	12.7(1/2)	12.7(1/2)
	Drain	I.D.	mm(inch)	12.2(15/32)	12.2(15/32)	12.2(15/32)	12.2(15/32)

Note :

1. Capacities are based on the following conditions

Cooling - Indoor temp. 27°C(80.6°F)DB / 19°C(66.2°F)WB
Outdoor temp. 35°C(95°F)DB / 24°C(75.2°F)WB
Interconnecting piping length 7.5m
Level difference of zero

Heating - Indoor temp. 20°C(68°F)DB / 15°C(59°F)WB
Outdoor temp. 7°C(44.6°F)DB / 6°C(42.8°F)WB
Interconnecting piping length 7.5m
Level difference of zero

2. Due to our policy of innovation some specifications may be changed without notification

INDOOR UNITS

Accessories

Model	ARNU07GQAA2	ARNU09GQAA2	ARNU12GQAA2	ARNU15GQAA2
Dry Contact	Without Case (1 Contact Point)	PQDSA		
	With Case (1 Contact Point)	PQDSB / PQDSB1		
	With Case (2 Contact Point)	PQDSBC		

Wired Remote Controller					Wireless Remote Controller
Deluxe Type	Standard Type	Standard Type	Simple Type	Simple Type for Hotel	
PQRCUDS0(white) PQRCUDSOB(blue) PQRCUDSOS(silver)	PQRCVSLO	PQRCVSLQW	PQRCVCLQ (Black) PQRCVCLQW (white)	PQRCCHA0Q(Black) PQRCCHA0QW(White)	PQWRHQ0FDB